

Specifications for: [OSOP Raspberry Shake 3D](#)

- Your 3D Personal Seismograph -

An IoT home-automation device

Born on: February, 2017

<http://shop.raspberryshake.org/>

sales@raspberrysshake.org

Last updated: 23-november-2018

Unit

The Raspberry Shake 3D Personal Seismograph is an all-in-one, IoT plug-and-go solution for personal seismology- [OSOP, S.A.](#) integrates a 3 orthogonal velocity sensors, the digitizers, the hyper dampers, and the computer into *a single box*. The Raspberry Shake 3D Personal Seismograph is manufactured in Volcán, Panamá using cutting-edge 3D printing and laser-cutting technology.

Warranty: 1 year from ship date

Specifications subject to change without notice.

Parameter	Value
Raspberry Shake 3D Version	V5, V3
Dimensions (estimated)	140x130x60 mm
Weight (estimated)	0.6 kg
Immersion rating	<i>Standard enclosure: IP10</i> <i>IP67 enclosure available upon request at additional cost</i>
Connectors	<i>Standard enclosure: Ethernet (RJ45), Power Micro USB (5V, 2.5 Amps), USB 2 ports x4, HDMI, Micro SD, CSI Camera port, Composite video and audio output jack</i>


	<i>IP67 enclosure: Ethernet (RJ45), Power</i>
Installation Considerations	Designed for plug-and-go installation
Operating Temperature	0 to 60 C (limited by RPi, the Raspberry Shake itself can go to -20C)
On Board Computer	<p>Wifi-enabled Raspberry Pi 3 Model B</p> <p><i>The Raspberry Shake board/ Software is also compatible with:</i></p> <p>00[10,13],900032: Model B+</p> <p>a[01040,01041,21041,22042]: 2 Model B</p> <p>a[02082,22082,32082,52082]: 3 Model B</p> <p>a020d3: 3 Model B+</p>
Storage Device	<p>8 Gb or + micro SD card</p> <p><u><i>Est. # days of disk space:</i></u></p> <p>OS/ software: ~3 Gb</p> <p>Remaining space for data: ~5 Gb</p> <p># days (15 Mb/ day/ channel [x3]): ~110, more if you use a bigger SD</p>
Timing	<p>Network Timing Protocol, NTP (default)</p> <p>GPS timing supported</p>
Timing Quality	NTP timing quality remains within 1 sample of accuracy versus startup accuracy: +/- 10 ms or better @ 100 sps

Seismograph


Parameter	Value
Type	3-component, orthogonally placed 4.5 Hz (electronically extended down to 2 seconds) Sunfull PS-4.5B geophones, 375 Ohm <i>Note: These are not the same geophones used in the 1D and 4D versions of Raspberry Shake</i>
Samples per second	100
<i>Earthquake Early Warning (EEW) compatible</i> <i>data packets shipped across serial port at a rate of 4 packets/ second (250 ms/ packet)</i>	
Bandwidth (estimate)	V5: -3dB points at 0.7 to 39 Hz V3: -3dB points at 0.6 to 34 Hz
Poles (estimate)	V5: -1.99E +/- 1.72E+02; -3.93; -1.77; -9.59E-01 V3: 2.23E+02 +/- 2.95E+02; 3.76E-01; 0
Zeros (estimate)	V5: 0, 0, 0.2 V3: -1.96E+02 +/- 1.55E+02; 2.65 +/- 6.83E-01
Sensitivity (estimate)	V5: 3.40E+08 counts/ meter/ second +/- 10% precision V3: 3.53E+08 counts/ meter/ second +/- 10% precision
Clip Level (estimate)	+/- 8,388,608 counts (24-bits) V5/ V3: 24 mm/s peak-to-peak from 0.1 to 10 Hz

<p>Minimum Detection Threshold (estimate)</p>	<p>V5: 0.03 $\mu\text{m/ s}$ RMS from 1 to 20 Hz @ 100 sps V3: 0.06 $\mu\text{m/ s}$ RMS from 1 to 20 Hz @ 100 sps</p> <p><i>Note: The minimum detectable level is considered to be 10 dB above the noise RMS. Dynamic range is the full scale sinusoid RMS over the noise RMS in dB.</i></p>
<p>Digitizer Dynamic range</p>	<p>24-bit ADC Sigma-Delta $\Sigma\Delta$ 144 dB (24 bits)</p>
<p>Effective bits (estimate)</p>	<p>V5: 21 bits (124 dB) from 1 to 20 Hz @ 100 sps (for the entire analog to digital hardware chain). V3: 20 bits (120 dB) from 1 to 20 Hz @ 100 sps (for the entire analog to digital hardware chain).</p> <p><i>Note: Whereas most manufacturers report this for their digitizer only, we are reporting it for the entire sensor + ADC hardware chain. The effective bits of the digitizer itself are necessarily better.</i></p> <p>This parameter is also commonly known as “Dynamic Range”; “RMS to RMS noise”; or "noise free bits".</p>

Velocity Channel Instrument Response:

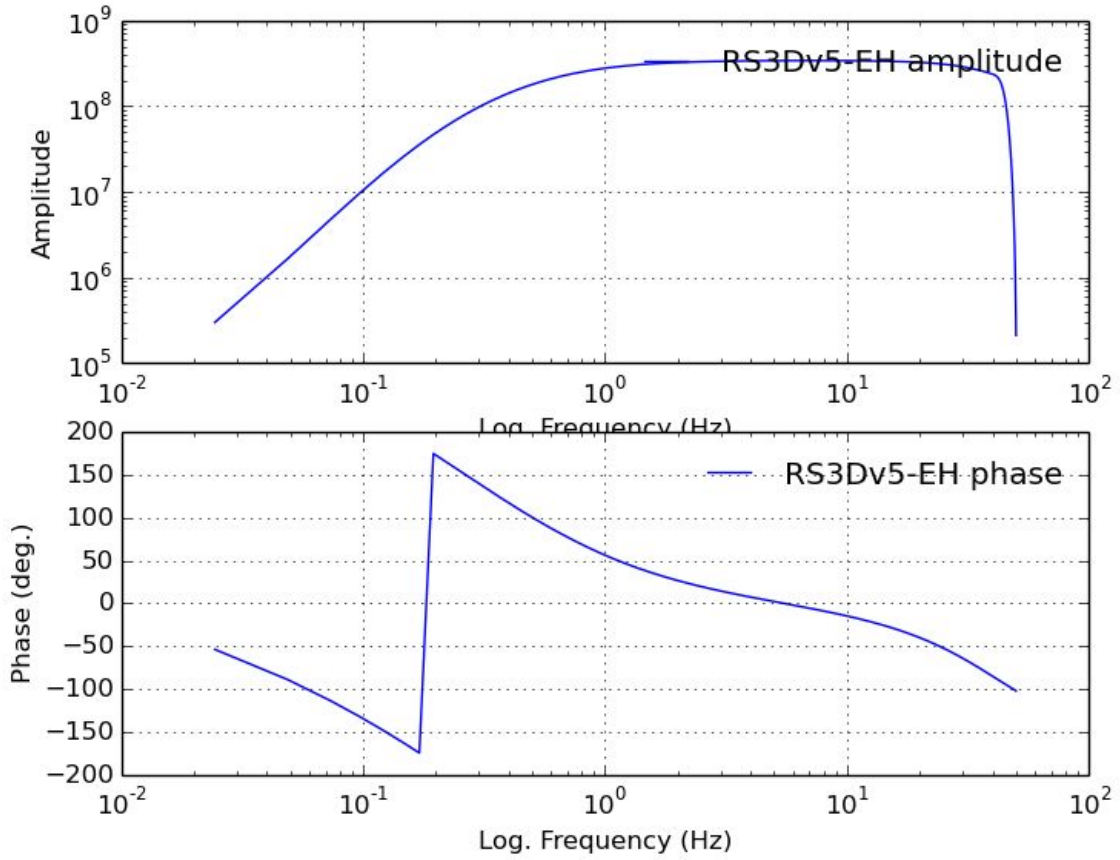

Sleeman Self-noise:

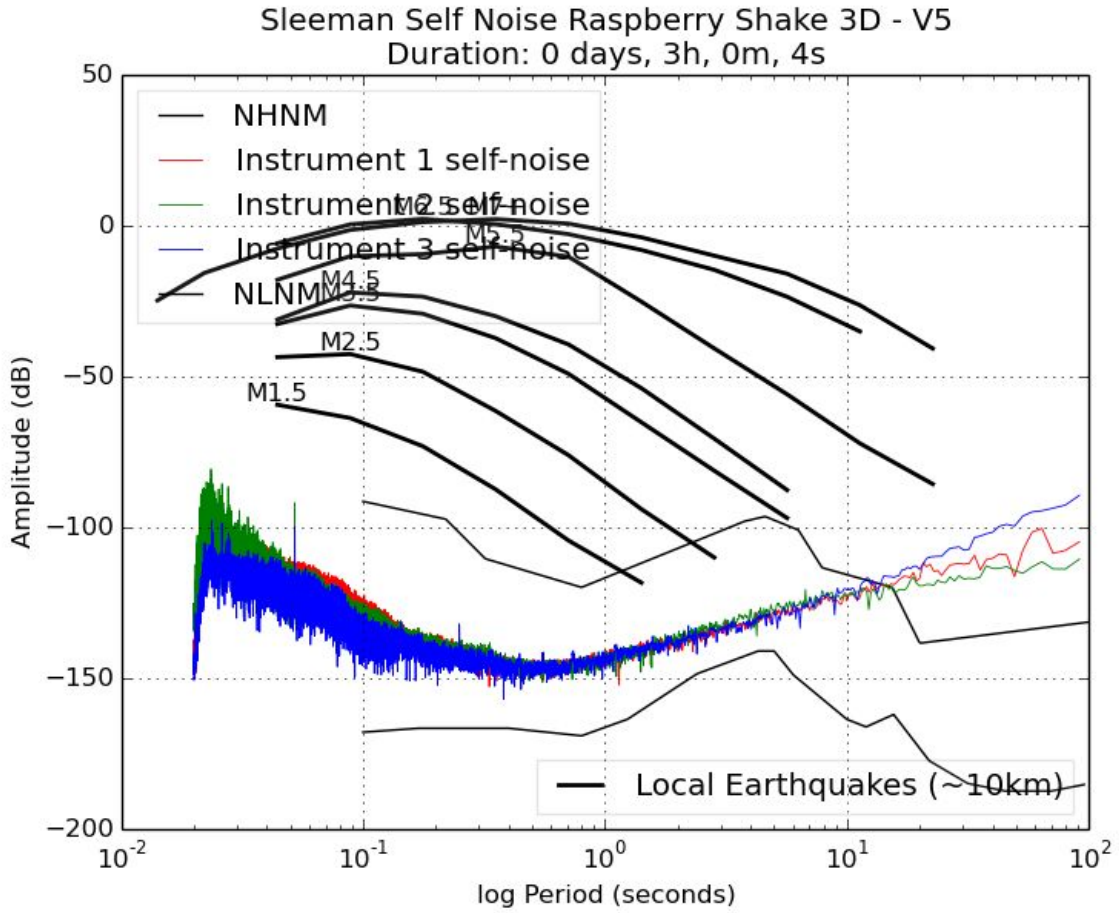

Software

Software installed on Raspberry Shake's RPi computer
100% SeisComP3 compatible Also: AQMS, Antelope, Earlybird, Earthworm, Hydra, ObsPy, SEISAN, ...
Native SeedLink Server (source: GEOFON) with OSOP Data Flow Message Router
Tight and automatic integration with SeisComP
Web-interface (HTML) for easy configuration
Software to store continuous seismic data in miniSEED format
Web-based helicorder plot generator (source: USGS)
Swarm (source: USGS)
Software distributed with Docker
Automatic updates
Operating System: Debian 8 (Linux)

Communications

Parameter	Value
Digital bandwidth consumption at 100 Hz, 3 channels (estimated)	Incoming rates RX: ~72.0 kbits/s Outgoing rates TX: ~282.0 kbits/s TCP Flow rate: 25.2 kbits/s
TCP/IP compatible	
Compatible with Wifi, Ethernet, Cell modem, GPRS, Satellite	

Power

Parameter	Value
Power Supply Voltage	5 Volts DC (2.5 Amp supply)
Power Consumption (RPi + Raspberry Shake, estimated)	Startup: 5 Volts x 0.550 A = 2.8 Watts Run-time: 5 Volts x 0.320 A = 1.6 Watts

Calibration Mechanism: Calibration not required over time but can be verified using the [OSOP Calibration Table](#). All seismographs are verified prior to shipping to ensure that their gain is within 10% of the nominal instrument response (up to 10% variation attributable to geophones and capacitors).

Questions?

Email us at sales@raspberrysake.org