

Specifications for: The Original (1D) [Raspberry Shake](http://shop.raspberrysshake.org/) by [OSOP](http://shop.raspberrysshake.org/)

- Your Personal Seismograph -

An IoT home automation device

Born on: October, 2016

<http://shop.raspberrysshake.org/>

sales@raspberrysshake.org

Last updated: 10-february-2018

Unit

The Raspberry Shake Personal Seismograph is an all-in-one, IoT plug-and-go solution for personal seismology- [OSOP, S.A.](http://shop.raspberrysshake.org/) integrates a vertical (1D) velocity sensor, the digitizer, the hyper damper, and the computer into *a single box*. The Raspberry Shake Personal Seismograph is manufactured in Volcán, Panamá using cutting-edge 3D printing and laser-cutting technology.

Warranty: 1 year from ship date

Specifications subject to change without notice.

Parameter	Value
Raspberry Shake Version	V6 / V5 / V4
Dimensions (estimated)	100x120x50 mm
Weight (estimated)	0.35 kg
Immersion rating	<i>Standard enclosure: IP10</i> <i>IP67 enclosure available upon request at additional cost</i>
Connectors	<i>Standard enclosure: Ethernet (RJ45), Power Micro USB (5V, 2.5 Amps), USB 2 ports x4,</i>

	<p>HDMI, Micro SD, CSI Camera port, Composite video and audio output jack</p> <p><i>IP67 enclosure: Ethernet (RJ45), Power</i></p>												
Installation Considerations	Designed for plug-and-go installation												
Operating Temperature	0 to 60 C (limited by RPi, the Raspberry Shake itself can go to -40C)												
On Board Computer	<p>Wifi-enabled Raspberry Pi 3 Model B</p> <p><i>The Raspberry Shake board/ Software is also compatible with:</i></p> <table style="margin-left: 40px;"> <tr> <td>000[d,e]:</td> <td>Model B</td> </tr> <tr> <td>00[10,13]:</td> <td>Model B+</td> </tr> <tr> <td>a[01040,01041,21041]:</td> <td>2 Model B</td> </tr> <tr> <td>9000[92,93],920093:</td> <td>Zero</td> </tr> <tr> <td>a[02082,22082,a32082]:</td> <td>3 Model B</td> </tr> <tr> <td>9000c1</td> <td>Zero W</td> </tr> </table>	000[d,e]:	Model B	00[10,13]:	Model B+	a[01040,01041,21041]:	2 Model B	9000[92,93],920093:	Zero	a[02082,22082,a32082]:	3 Model B	9000c1	Zero W
000[d,e]:	Model B												
00[10,13]:	Model B+												
a[01040,01041,21041]:	2 Model B												
9000[92,93],920093:	Zero												
a[02082,22082,a32082]:	3 Model B												
9000c1	Zero W												
Storage Device	<p>8 Gb or + micro SD card</p> <p><u><i>Est. # days of disk space:</i></u> OS/ software: ~3 Gb</p> <p>Remaining space for data: ~5 Gb</p> <p># days (7.5 Mb/ day/ channel [x1]): ~660, more if you use a bigger SD</p>												
Timing	<p>Network Timing Protocol, NTP (default)</p> <p>GPS timing supported</p>												
Timing Quality	NTP timing quality remains within 1 sample of accuracy versus startup accuracy:												

	<p>V6: +/- 10 ms or better @ 100 sps</p> <p>V5 / V4: +/- 20 ms or better @ 50 sps</p>
--	---


Seismograph

Parameter	Value
Type	Single-component 4.5 Hz 395 Ohm vertical Racotech RGI-20DX geophone with electronic extension to lower frequencies (<1 Hz)
Samples per second	V6: 100 sps V5 / V4: 50 sps
<p><i>Earthquake Early Warning (EEW) compatible*</i></p> <p><i>V6: data packets shipped across serial port at a rate of 4 packets/ second (250 ms/ packet)</i></p> <p><i>V5/ V4: data packets shipped across serial port at a rate of 1 packet/ second (1000 ms/ packet)</i></p>	
Bandwidth (estimated)	V6: -3dB points at 0.8 to 29 Hz V5/V4: -3dB points at 0.8 to 23 Hz
Poles (estimated)	V6: -4.88+/-3.06E+02, -2.22+/-1.18E+02, -3.33+/-1.98E+02 V5/V4: -4.21, -2.33, -1.30
Zeros (estimated)	V6: -4.51+/-3.08E+02, 0, 0 V5/V4: -6.75, 0, 0, 0
Sensitivity (estimated)	V6: 3.81E+08 counts/ meter/ second +/- 10% precision V5/V4: 4.69E+08 counts/ meter/ second +/- 10% precision
Clip Level (estimated)	+/- 8,388,608 counts (24-bits) V6: 22 mm/s peak-to-peak from 0.1 to 10 Hz


	V5/V4: 18 mm/s peak-to-peak from 0.1 to 10 Hz
Minimum Detection Threshold (estimate)	<p>V6: 0.03 $\mu\text{m/s}$ RMS from 1 to 20 Hz @ 100 sps</p> <p>V5/V4: 0.14 $\mu\text{m/s}$ RMS from 1 to 20 Hz @ 50 sps</p> <p><i>Note: The minimum detectable level is considered to be 10 dB above the noise RMS. Dynamic range is the full scale sinusoid RMS over the noise RMS in dB.</i></p>
Digitizer Dynamic range	<p>24-bit ADC Sigma-Delta $\Sigma\Delta$</p> <p>144 dB (24 bits)</p>
Effective bits (estimated)	<p>V6: 21 bits (126 dB) from 1 to 20 Hz @ 100 sps</p> <p>V5/V4: 18.5 bits (110.5 dB) from 1 to 20 Hz @ 50 sps (for the entire analog to digital hardware chain).</p> <p><i>Note: Whereas most manufacturers report this for their digitizer only, we are reporting it for the entire sensor + ADC hardware chain. The effective bits of the digitizer itself are necessarily better.</i></p> <p>This parameter is also commonly known as “Dynamic Range”; “RMS to RMS noise”; or "noise free bits".</p>

*Applies to firmware versions 2.X.X and higher and units shipped purchased after July, 2017

Velocity Channel Instrument Response:

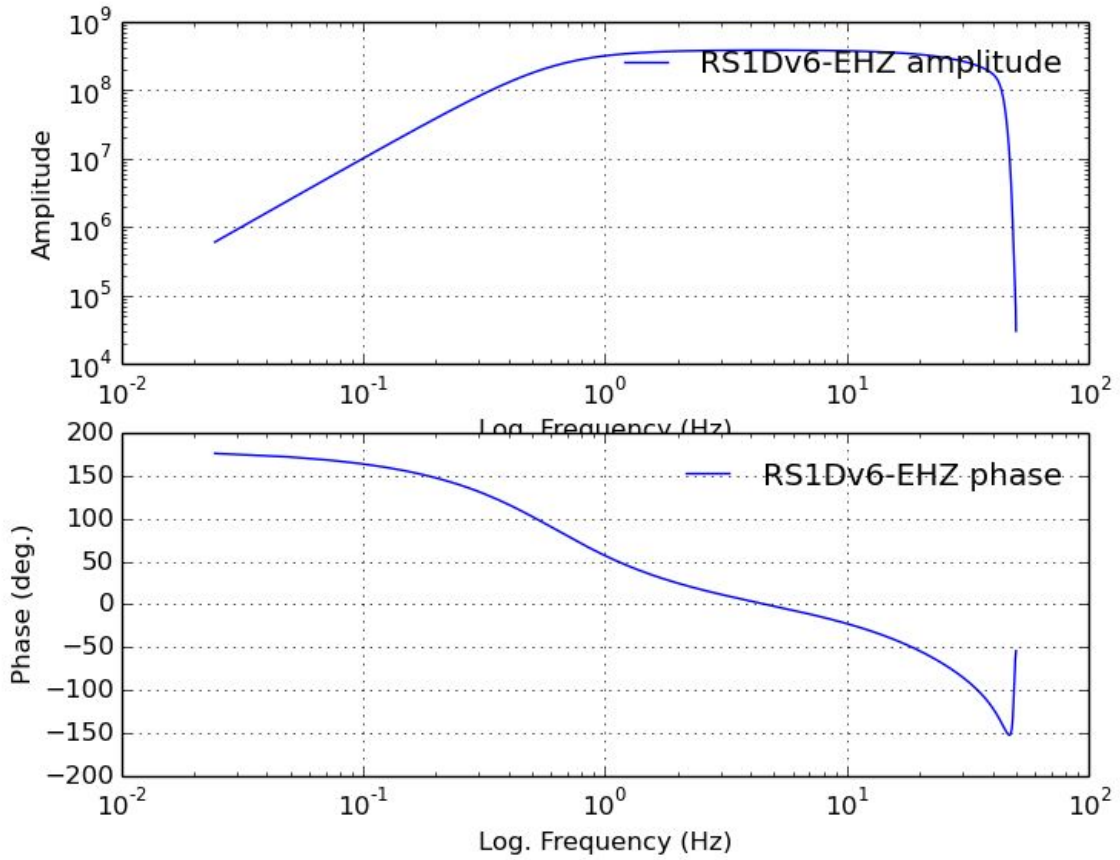

Sleeman Self-Noise:

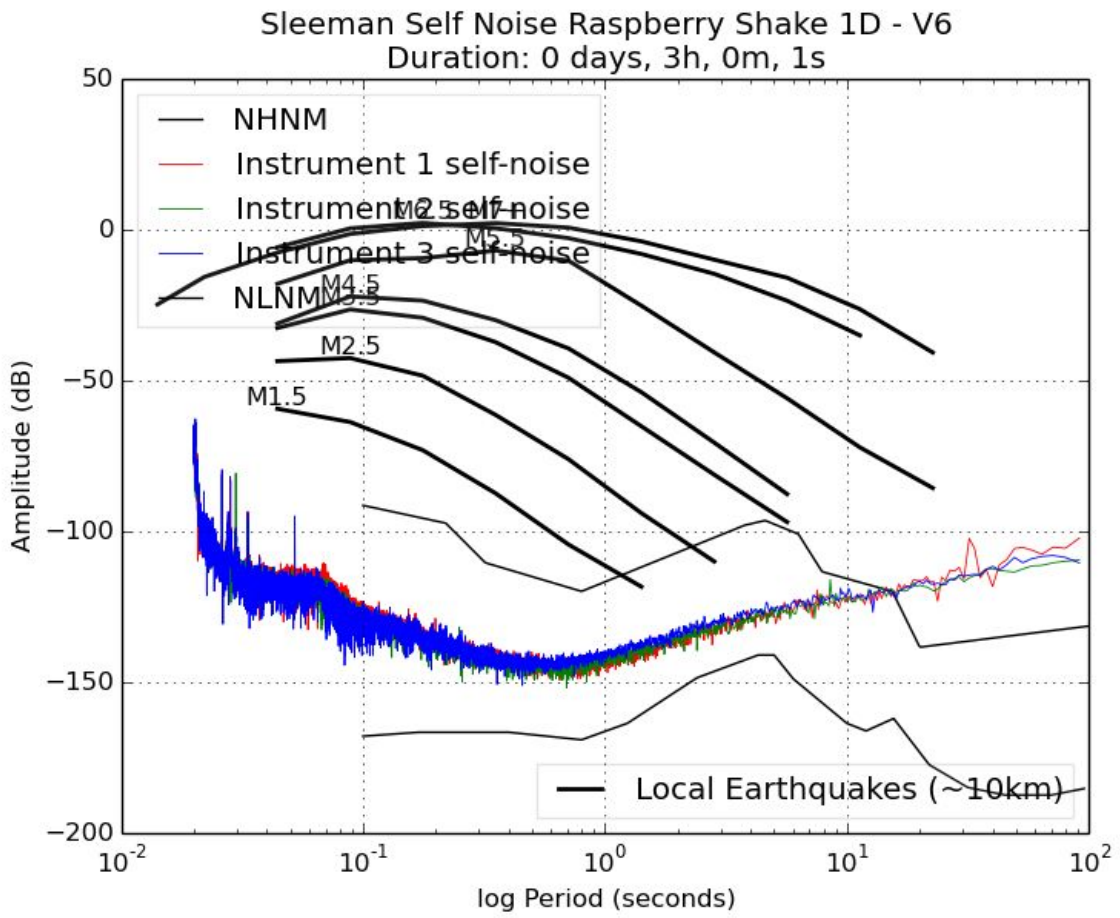

Software

Software installed on Raspberry Shake's RPi computer
100% SeisComP3 compatible Also: AQMS, Antelope, Earlybird, Earthworm, Hydra, ObsPy, SEISAN, ...
Native SeedLink Server (source: GEOFON) with OSOP Data Flow Message Router
Tight and automatic integration with SeisComP
Web-interface (HTML) for easy configuration
Software to store continuous seismic data in miniSEED format
Web-based helicorder plot generator (source: USGS)
Swarm (source: USGS)
Software distributed with Docker
Automatic updates
Operating System: Debian 8 (Linux)

Communications

Parameter	Value
Digital bandwidth consumption at 50 Hz, 1 channel (estimated)	Incoming rates RX: ~12.0 kbits/s Outgoing rates TX: ~47.0 kbits/s TCP Flow rate: 4.20 kbits/s
TCP/IP compatible	
Compatible with Wifi, Ethernet, Cell modem, GPRS, Satellite	

Power

Parameter	Value
Power Supply Voltage	5 Volts DC (2.5 Amp supply)
Power Consumption (RPI + Raspberry Shake, estimated)	Startup: 5 Volts x 0.550 A = 2.8 Watts Run-time: 5 Volts x 0.290 A = 1.5 Watts

Calibration Mechanism: Calibration not required over time but can be verified using the [OSOP Calibration Table](#). All seismographs are verified prior to shipping to ensure that their gain is within 10% of the nominal instrument response (up to 10% variation attributable to geophones and capacitors).

Questions?

Email us at sales@raspberrysshake.org